

# NW3

## NEPTUNE 300 WBS



### PRODUCT INTRODUCTION

New ear of IP65 moving beam wash with high efficient RGBL resource, ultra-wide zoom range, excellent beam and wash effects. Light weight and compact design, super fast and accurate XY performance. It is suitable for both outdoor or indoor events, road shows, concerts, operas, banquets and various performance.



### PRODUCT PARAMETERS

#### Optical system

Light source 7\*40W RGBL  
 Beam angle 3.5-35°  
 Field angle 5-50°  
 LED Ring RGB Ring

#### Appearance

Size 290X227X369mm  
 Weight 9.8KG  
 Casing Flame-retardant plastic, die-casting aluminum  
 Color Black

#### Electrical Specs

Voltage 100-240VAC, 50/60Hz  
 Max. Power 320W  
 Power Connection power in and out  
 Signal socket 3pin or 5pin in and out

#### Control System

Pan/Tilt rotation 540°/220°(8-16bit)  
 Dimmer 0-100%16Bit  
 Cooling Forced Convection  
 Control DMX512, RDM, W-DMX (optional)



Display On board Control, Custom Mode, 0-25Hz Strobe  
 Con Personality HSIC\SSP\TOUR\TR16\CMY\PIXEL  
 Special Pan/Tilt movement blackout, User-selectable pan/tilt ranges

#### Certification

#### Work Environment

Ambient Temp -20-45 °C  
 IP Rated IP66

### ILLUMINANCE AT DISTANCE

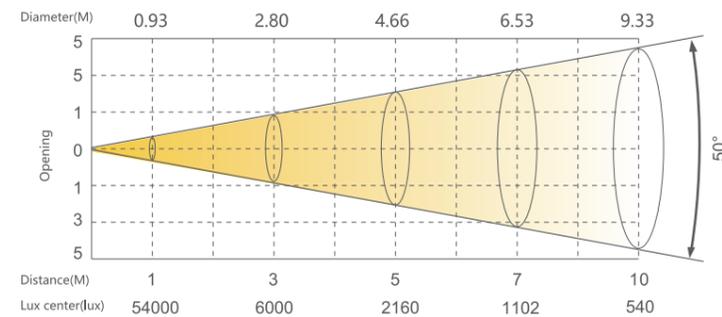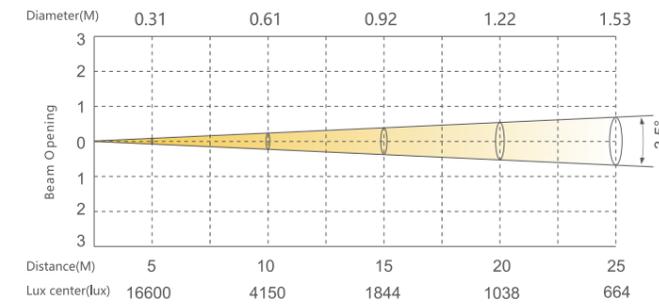

### DIMENSIONS

