

# N8

## SS9483SCM



### PRODUCT INTRODUCTION

N8 is a 650W LED Moving head, with beam, framing, spot, washing all in one. On the basis of the original N7, the newly upgraded optical Angle is 6°-50° minimum Angle 5 meters illumination up to 11,300lux. The tilt movement speed is increased to 1.5 seconds per Round, with NFC can connect the fixture quickly and set the basic function very easily by the YJNFC app, the linear CMYK color mixing system provides rich color saturation, the adjustable linear CTO color temperature, and the professional framing system can cut out any sharp projection. Dynamic animation wheel can be created with water and fire effects. Designed to provide the best choice for venues such as theater, TV stations, concerts and rental shows.

### PRODUCT PARAMETERS

#### Optical system

Light source 650W  
 Angle 6°-50°  
 illuminance 5m@11,300lux

#### Appearance

Size 416x364x728mm  
 Weight 34kg  
 Casing Flame-retardant plastic (VO), Die-cast aluminum  
 Color Black

#### Electrical Specs

Voltage AC100-240V  
 Max. Power 800W  
 Power Connection Power in and out  
 Signal socket 3pin or 5 pin in and out, RJ45 in and out

#### Control System

Pan/Tilt rotation 540°/270°(8-16bit)  
 Dimmer 0-100% 16Bit  
 Cooling Direct Convection  
 Control DMX/RDM/ARTNET/sACN/W-DMX (Optional).webserver

Display On Board Control, 0-25Hz Strobe  
 Con Personality BASIC/35CHS. STANDARD/41CHS. Extend/44CHS

#### Effect synthetic system

Rotating Gobo 7 Gobos+ White, Gobo-flow effect, Gobo shake, Bi-directional rotation  
 Static Gobo 10 + 1 Gobos  
 Colors One color wheel(6 dichroic-filters +White, Rainbow-flow effect)  
 CMYK CMY, CTO  
 Prism One piece of 4 F prism with bi-directional rotation, Speed adjustable

Framing system 4 shutter blade; Each blade's angel and direction can be individual controlled, fully blackout; The whole Framing module is ±45°.  
 Animation Wheel 1 animation wheel  
 Iris 5-100% linearly adjustable with macro  
 Focus Motorized linear focus  
 Zoom Motorized linear Zoom  
 Frost (light+medium) 2Frost filter


#### Certification

CE


#### Work Environment

Ambient Temp -20°C-45°C  
 IP Rated IP66

### ILLUMINANCE AT DISTANCE

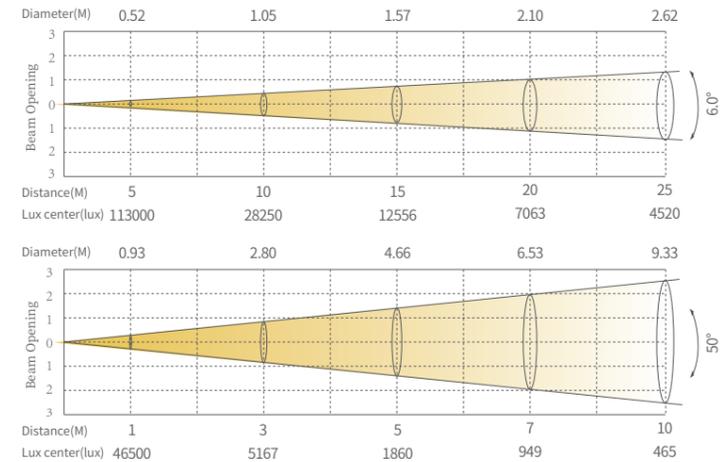

### FIXED GOBO

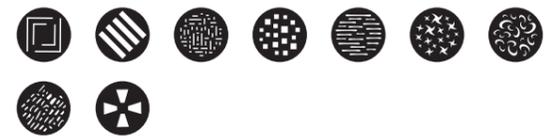

### Colors



### Rotation Gobo



### CMY+CTO




### Framing system




### Animation Wheel



### DIMENSIONS

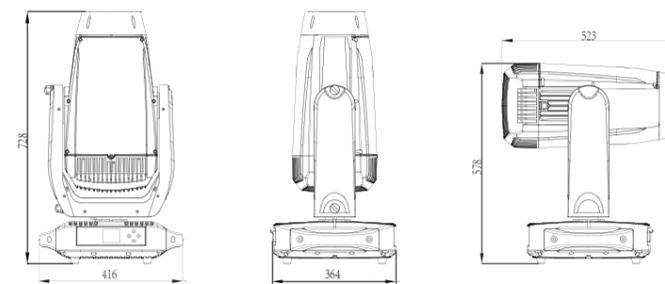

### ACCESSORIES Accessories not included unless otherwise stated



Flight case (1320400259)

Wireless receiving module (2440010465)